

Panel Meters



Panel Meter LNK10、 LNK11

Function/Size	Type Designation	Article No.
Moving Iron Instruments AC/DC Ammeter (LNK10)		
AC Ammeter/96	LNK10-96AA	K1001
AC Ammeter/72	LNK10-72AA	K1002
AC Ammeter/48	LNK10-48AA	K1003
DC Ammeter/96	LNK10-96AD	K1004
DC Ammeter/72	LNK10-72AD	K1005
DC Ammeter/48	LNK10-48AD	K1006
Moving Coil Instruments With Rectifier AC Ammeter(LNK11)		
AC Ammeter/96	LNK11-96AA	K1101
AC Ammeter/72	LNK11-72AA	K1102
AC Ammeter/48	LNK11-48AA	K1103

Technical Data


Panel Meter - LNK10、 LNK11

- It is electric measurement which direct reflect the current voltage,Hz,Cos power consumption of the circuit
- It can be stalled in cabinets and panel boards

Function

Name	Moving Iron Instruments AC/DC Ammeter(LNK10)		
Type Size(mm)	SD-96	SD-72	SD-48
	96×96	72×72	48×48
Accuary	Class1.5	Class1.5	Class2.5
Specification(SD-96A ,AC)	0.5A 1A 1.5A 3A 5A 7.5A 10A 15A 20A 25A 30A 40A 50A 60A 80A 100A, if over 100A, meters can be contacted current transformer with secondary current 5A or 1A		
Specification(SD-72A ,AC)	0.5A 1A 1.5A 3A 5A 7.5A 10A 15A 20A 25A 30A 40A 50A 60A 80A 100A, if over 100A, meters can be contacted current transformer with secondary current 5A or 1A		
Specification(SD-48A ,AC)	0.5A 1A 1.5A 3A 5A 7.5A 10A 15A 20A 25A 30A 40A 50A 60A, if over 60A, meters can be contacted current transformer with secondary current 5A or 1A		
Specification(SD-96A ,DC)	50uA 100uA 150uA 500uA 1mA 2mA 5mA 10mA 20mA 30mA 50mA 75mA 100mA 150mA 200mA 250mA 300mA 500mA 1A 2A 3A 7.5A 10A 20A 30A 50A 60A, if measuring ranges over 60A, meters can be connected external shunt with 50mV,60mV or 75mV		
Specification(SD-72A ,DC)	50uA 100uA 150uA 500uA 1mA 2mA 5mA 10mA 20mA 30mA 50mA 75mA 100mA 150mA 200mA 250mA 300mA 500mA 1A 2A 3A 7.5A 10A 20A 30A 50A 60A, if measuring ranges over 60A, meters can be connected external shunt with 50mV,60mV or 75mV		
Specification(SD-48A ,DC)	100uA 150uA 500uA 1mA 2mA 5mA 10mA 20mA 30mA 50mA 75mA 100mA 150mA 200mA 250mA 300mA 500mA 1A 2A 3A 7.5A 10A 20A 30A 50A, if measuring ranges over 50A, meters can be connected external shunt with 50mV,60mV or 75mV		
Name	Moving Coil Instruments With Rectifier AC Ammeter(LNK11)		
Type Size(mm)	SD-96	SD-72	SD-48
	96×96	72×72	48×48
Accuary	Class1.5		
Specification (SD-96A, AC)	0.1A 0.5A 1A 1.5A 3A 5A 7.5A 10A 15A, over 15A, meters can be contacted external current transformer, which secondary current is 5A or 1A		
Specification (SD-72A, AC)	10V 20V 30V 50V 75V 100V 120V 250V 300V 400V 450V 500V 600V, if over 600V, meters can be connected potential transformer with secondary voltage 100V		

Dimensions(mm)

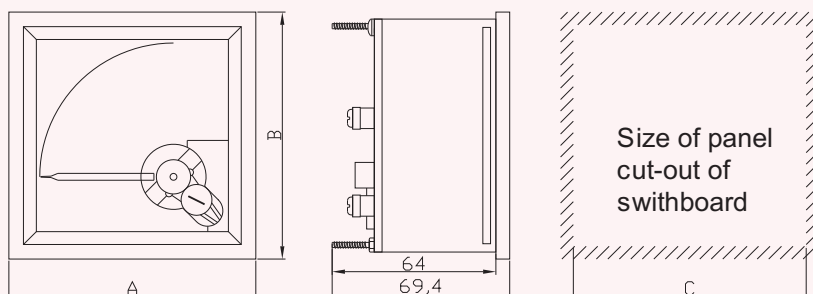

Type Size(mm)	A	B	C
SD-96	96.5	96.5	91
SD-72	71.8	71.8	67.5
SD-48	48.3	48.3	44.2