

### Digital Panel Meter LNK22

Function/Size	Type Designation	Article No.
<b>Digital Frequency Meter (LNK22)</b>		
48×48	LNK22-48Hz	K2201
72×72	LNK22-72Hz	K2202
96×96	LNK22-96Hz	K2203



## Technical Data

### Digital Panel Meter - LNK22


- It is electric measurement which direct reflect the current voltage, Hz, Cos power consumption of the circuit
- It can be stalled in cabinets and panel boards

### Function

Name	Digital Frequency Meter (LNK22)		
Type Size(mm)	DP-96 96×96	DP-72 72×72	DP-48 48×48
Display	4 digits.LED display		
Auxiliary Power	AC 110V±10% 50/60HZ OR 220V±10% 50/60HZ		
Input signal	AC 0-50V or 50-500V		
Accuracy	0.5%± 2digits		
Consumption	<3VA		
Voltage Testing	Over 2000V		
Operating Environment	Temperature 0°C-40°C humidity≤70%		
Measuring range	1.0-999.9-HZ		



### Dimensions(mm)

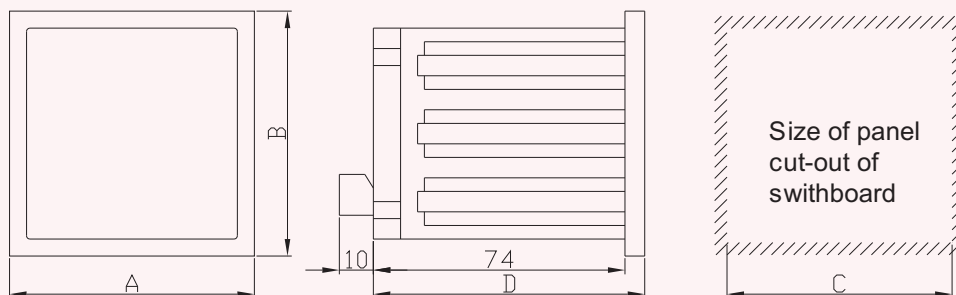

Type Size(mm)	A	B	C	D
RYK22-DP96	96	96	90.2	80
RYK22-DP72	72	72	66.2	79.8

