

Digital Panel Meter LNK23

Function/Size	Type Designation	Article No.
---------------	------------------	-------------

Digital Power Factor Meter(LNK23)

48×48	LNK23-48COS	K2301
72×72	LNK23-72COS	K2302
96×96	LNK23-96COS	K2303



Technical Data

Digital Panel Meter - LNK23


- It is electric measurement which direct reflect the current voltage,Hz,Cos power consumption of the circuit
- It can be stalled in cabinets and panel boards

Function

Name	Digital Power Factor Meter(LNK23)		
Type Size(mm)	DP-96 96×96	DP-72 72×72	DP-48 48×48
Display	3 digits.LED display		
Auxiliary Power	3Phase AC 110V±10% 50/60HZ OR 380V±10% 50/60HZ		
Input signal	3Phase AC 110V±10% 50/60HZ OR 380V±10% 50/60HZ, And AC 0-1A or 0-5A		
Accuary	1.0% ±2digits		
Consumption	<3VA		
Voltage Testing	Over 2000V		
Operating Environment	Temperature 0°C-40°C humidity≤70%		
Measuring range	0.4 Cap -0.99-0.4ind		



Dimensions(mm)

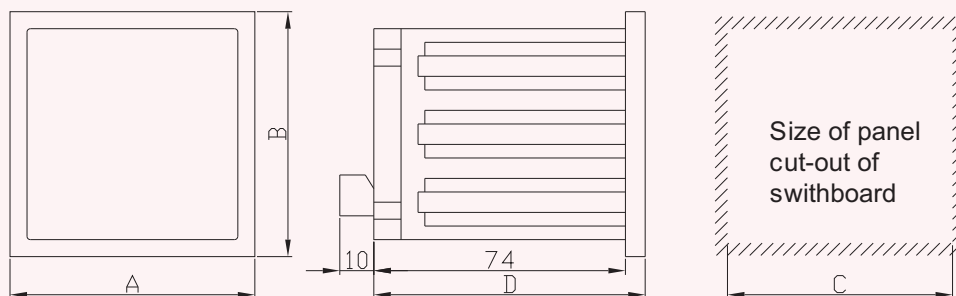

Type Size(mm)	A	B	C	D
RYK23-DP96	96	96	90.2	80
RYK23-DP72	72	72	66.2	79.8

