

Digital Panel Meter LNK20-1

Funcation/Size	Type Designation	Article No.
Digital AC/DC Ammeter (LNK20-1)		
AC Ammeter/48	LNK20-1-48AA	K2001
AC Ammeter/72	LNK20-1-72AA	K2002
AC Ammeter/96	LNK20-1-96AA	K2003
DC Ammeter/48	LNK20-1-48AD	K2004
DC Ammeter/72	LNK20-1-72AD	K2005
DC Ammeter/96	LNK20-1-96AD	K2006



Technical Data

Digital Panel Meter - LNK20-1


- It is electric measurement which direct reflect the current voltage,Hz,Cos power consumption of the circuit
- It can be stalled in cabinets and panel boards

Funcation

Name	Digital AC/DC Ammeter(LNK20-1)		
Type Size(mm)	DP-96 96×96	DP-72 72×72	DP-48 48×48
Display	31/2 digits.LED display		
Auxiliary Power	AC±110V±10% 50/60Hz 220V±10% 50/60Hz		
Input signal	AC/DC Current		
Accuary	0.5%±2digits	0.5%±2digits	0.5%±2digits
Consumption	<3VA		
Voltage Testing	Over 2000V		
Operating Environment	Temperature 0℃-40℃ humidity≤70%		
Measuring range(AC Ammeter)	0-5 AC for the current over 5A can use the AC current transformer		
Measuring range(DC Ammeter)	0-5AAC for the current over 5A can use the AC current transformer		



Dimensions(mm)

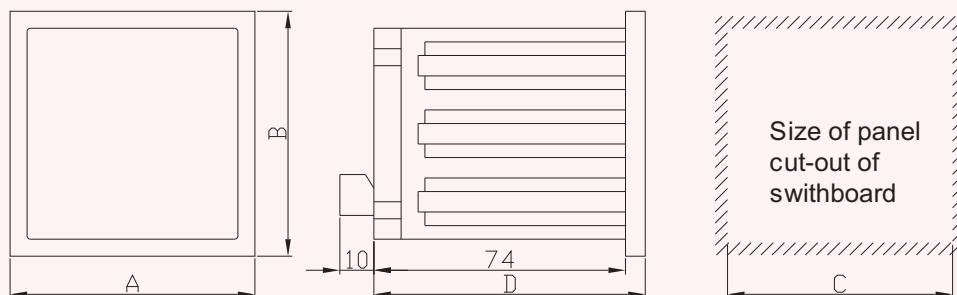

Type Size(mm)	A	B	C	D
LNK20-1-DP96	96	96	90.2	80
LNK20-1-DP72	72	72	66.2	79.8

